

MOTOMAN GP7 ACC, GP8 ACC

Handling & General Application
in corrosive Environments



Increase Productivity

Highest payloads, speeds and wrist allowable moment in its class

- A variety of workpieces can be transferred and different grippers can be mounted with 7-kg and 8-kg payloads and 38 % greater allowable moment
- Speeds of all axes have been increased by 39 % (max)
- Acceleration/deceleration control has been improved to achieve maximum reduction of acceleration/deceleration times for all robot postures


Make Equipment compact

Slim and easy-to-use structure


- Slim robot body requires minimum installation space (minimizes L-U axis offset)
- The manipulator cable can be connected at the bottom section, which reduces interference with walls and requires far less installation space when compared with cable connections on the side of the robot
- Increased maximum reach and horizontal reach enables robots to operate in wider work areas
- The slim, straight, and symmetrical arm design minimize interference with peripheral devices even in small spaces

KEY BENEFITS

- Anti-Corrosive painting allows robot to be used in environments with corrosive atmosphere such as acids, alkali and vapors
- Drip proof design assures smooth disposal of a liquid on the robot surface
- Excellent resistance to oil and chemicals
- Good abrasion resistance

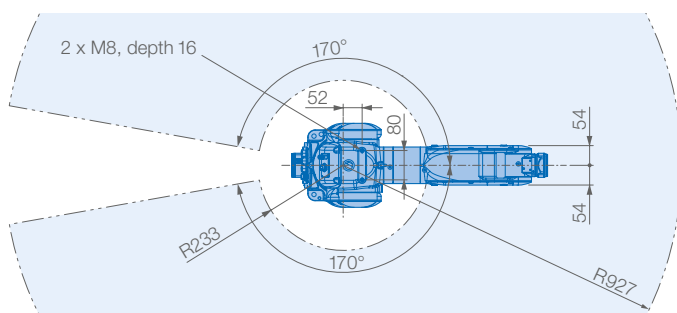

- Free from corrosive gasses or liquids, or explosive gasses
- Free from exposure to water, oil or dust
- Free from excessive electrical noise (plasma)

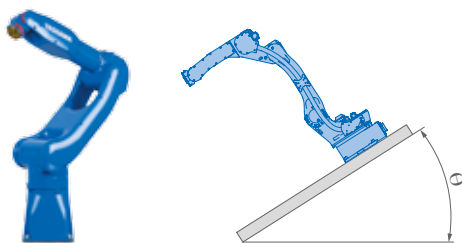

4 x M5, depth 9

45°

Ø 31.5

Ø 12 H6

Fitting Depth

Ø 5 H7, depth 7



[illegible][illegible]

Protection class: IP67


* tilt with condition of angle – see table below

Robot installation angle θ [deg.]	S-axis operating range [deg.]
$0 \leq \theta \leq 30$	± 170 degrees or less (no limit)
$30 < \theta \leq 35$	± 60 degrees or less
$35 < \theta \leq 40$	± 50 degrees or less
$40 < \theta \leq 45$	± 45 degrees or less
$45 < \theta \leq 50$	± 40 degrees or less
$50 < \theta \leq 60$	± 35 degrees or less
$60 < \theta$	± 30 degrees or less


Specifications GP7 ACC						
Axes	Maximum motion range [°]	Maximum speed [°/sec.]	Allowable moment [Nm]	Allowable moment of inertia [kg · m²]	Controlled axes	6
					Max. payload [kg]	7
S	±170	375	–	–	Repeatability [mm]	±0.03*
L	+145/–65	315	–	–	Max. working range R [mm]	927
U	+255/–116	410	–	–	Temperature [°C]	0 to +45
R	±190	550	17	0.5	Humidity [%]	20 – 80
B	±135	550	17	0.5	Weight [kg]	34
T	±360	1000	10	0.2	Power supply, average [KVA]	1**

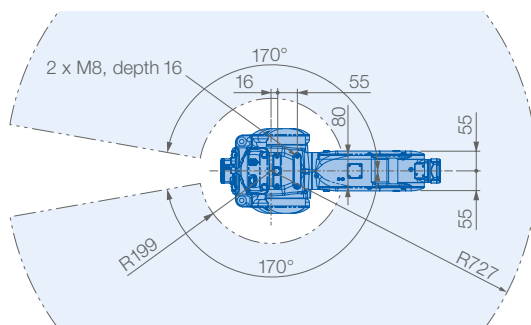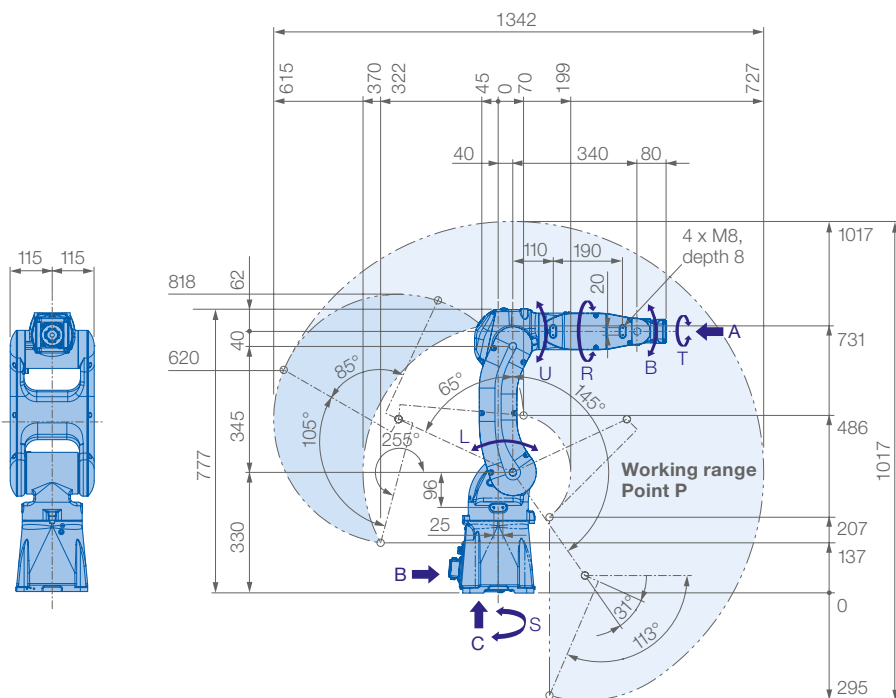


- Free from corrosive gasses or liquids, or explosive gasses
- Free from exposure to water, oil or dust
- Free from excessive electrical noise (plasma)

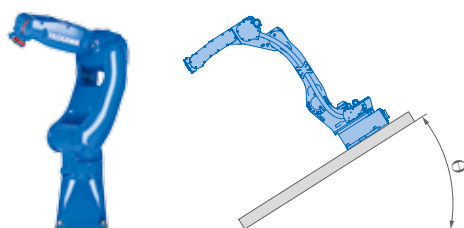


Allowable wrist load




View A

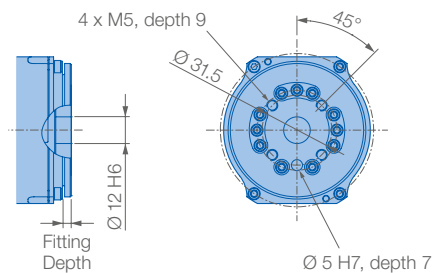

View B

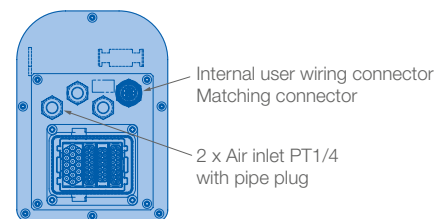

View C

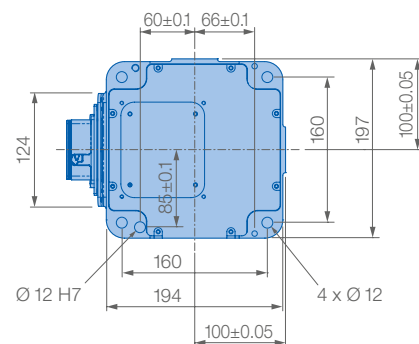

Mounting options: Floor, ceiling, wall, tilt*

Protection class: IP67

* tilt with condition of angle – see table below

Robot installation angle θ [deg.]	S-axis operating range [deg.]
$0 \leq \theta \leq 30$	± 170 degrees or less (no limit)
$30 < \theta \leq 35$	± 60 degrees or less
$35 < \theta \leq 40$	± 50 degrees or less
$40 < \theta \leq 45$	± 45 degrees or less
$45 < \theta \leq 50$	± 40 degrees or less
$50 < \theta \leq 60$	± 35 degrees or less
$60 < \theta$	± 30 degrees or less

Specifications GP8 ACC

Axes	Maximum motion range [°]	Maximum speed [°/sec.]	Allowable moment [Nm]	Allowable moment of inertia [kg · m ²]	Controlled axes	
S	± 170	455	–	–	Max. payload [kg]	6
L	$+145/-65$	385	–	–	Repeatability [mm]	8
U	$+255/-113$	520	–	–	Max. working range R [mm]	$\pm 0.02^*$
R	± 190	550	17	0.5	Temperature [°C]	727
B	± 135	550	17	0.5	Humidity [%]	0 to +45
T	± 360	1000	10	0.2	Weight [kg]	20 – 80
					Power supply, average [KVA]	32
						1**

YASKAWA Headquarters

YASKAWA Europe GmbH
Robotics Division
Yaskawastraße 1
85391 Allershausen, Germany
Tel. +49 (0) 8166/90-0
Fax +49 (0) 8166/90-103

YASKAWA ACADEMY

and sales office Frankfurt
YASKAWA Europe GmbH
Robotics Division
Hauptstraße 185
65760 Eschborn, Germany
Tel. +49 (0) 6196/77725-0
Fax +49 (0) 6196/77725-39

YASKAWA GROUP

AT YASKAWA Austria
Schwechat/Wien
+43(0)1-707-9324-15

CZ YASKAWA Czech s.r.o.
Rudná u Prahy
+420-257-941-718

ES YASKAWA Ibérica, S.L.
Gavà/Barcelona
+34-93-6303478

FR YASKAWA France SARL
Saint-Aignan-de-Grand-Lieu
+33-2-40131919

FI YASKAWA Finland Oy
Turku +358-(0)-403000600

GB YASKAWA UK Ltd.
Banbury +44-1295-272755

IT YASKAWA Italia s.r.l.
Torino +39-011-9005833

IL YASKAWA Europe Technology Ltd.
Rosh Ha'ayin +972-3-9004114

NL YASKAWA Benelux B.V.
Son +31-40-2895500

PL YASKAWA Polska Sp. z o.o.
Wrocław +48-71-7928670

RU YASKAWA Nordic AB
Moskva +46-480-417-800

SE YASKAWA Nordic AB
Torsås +46-480-417-800

SI YASKAWA Slovenia
Ribnica +386-1-8372-410

TR YASKAWA Turkey Elektrik
Ticaret Ltd. Sti.
İstanbul +90-216-5273450

ZA YASKAWA Southern Africa (PTY) Ltd
Johannesburg +27-11-6083182

DISTRIBUTORS

BG ARAMET ROBOTICS Ltd.
Yambol +359-885 317 294

Kammarton Bulgaria Ltd.
Sofia +359-02-926-6060

CH Messer Eutectic Castolin
Switzerland S.A.
Dällikon +41-44-847-17-17

DK Robotcenter Danmark
Løsning +45 7022 2477

EE RKR Seadmed OÜ
Tallinn/Estonia +372-68-35-235

GR Gizelis Robotics
Nea Kifissia +30-2106251455

HU Flexman Robotics Kft
Budapest +36-30-9510065

LT Profibus UAB
Panevezys +370-45-518575

NO Skala Robotech AS
Lierstranda +47-32240600

PT ROBOPLAN Lda
Aveiro +351-234 943 900

RO Sam Robotics srl
Timisoara +40-720-279-866

MPL Automation S.R.L.
Satu Mare +40 (0) 261 750 741

